


# TOUCH 101A11



## COLOUR



## DIMENSIONS

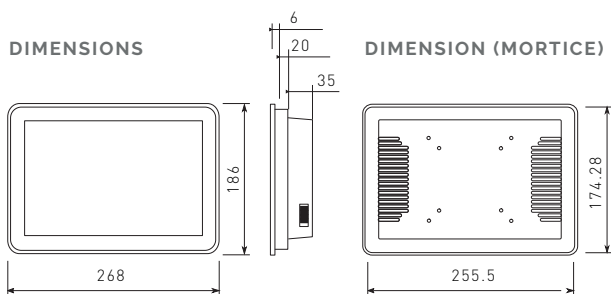

## SPECIFICATION

Display	
Size	10.1" / 16:10
Resolution	1280 x 800
Contrast	800:1
Luminance standard	800 nit
Display colors	16.7M (8-bit)
Technology	IPS, capacitive touch screen

Performance	
CPU	A72+A53 Quad-core 1.86 GHz
Operating memory	4 GB
Flash drive	32 GB eMMC
OS	Android 11.0

Android 11.0 panel PC with capacitive touch screen 10.1". It has been designed to be used in a wide range of applications for supervision and technology control.

### The panel can be used as a universal user interface for any controller with a webserver.

The panel is supplied together with SAFECONTROL Kiosk application suitable for working with any website in any time. The application allows to set a wide range of parameters according to the needs of a particular project.

## KEY FEATURES



### Suitable for extreme conditions

(resistant to water and dust, shocks and EMC emissions)



### Without rotating parts

24/7 operation

### Mounting to a panel

Configurable Kiosk SAFECONTROL application

## TYPICAL APPLICATIONS



### Replacement of conventional switches and thermostats

### Supervision and control of building technologies

(heating, cooling, air-conditioning, lighting, shading etc.)

### Digital signaler and information kiosks

Reservation and attendance systems

## Interfaces

Power Consumption	24 VDC / max 60 W
Ethernet	1 x RJ 45 (10/100 base-T)
Wireless	Wi-Fi, Bluetooth
COM	2 x RS-232
External interfaces	USB, VGA, HDMI

## Housing and Environment

Dimensions	261 x 196 x 61 mm
Construction	aluminum, black and silver
Protection	IP65 (front side)
Operating conditons	-20°C to 70°C/10% to 80%
Certification	CE, FCC, RoHS, ISO