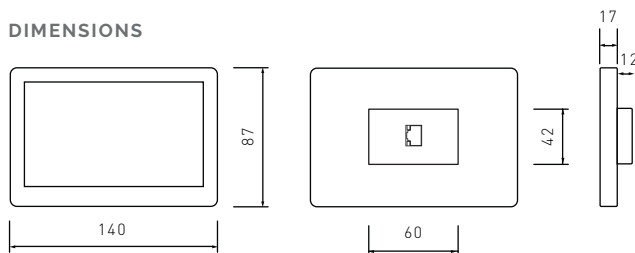


TOUCH 50A POE


COLOUR

DIMENSIONS

SPECIFICATION

Display	
Size	7" / 16:9
Resolution	1280 x 720
Contrast	500:1
Luminance standard	350 nit
Display colors	16.7M
Technology	IPS, capacitive touch screen

Performance	
CPU	Quad-core 1,2 GHz
Operating memory	1 GB
Flash drive	8 GB Flash
OS	Android 7.1.1

Panel is not suitable to extreme temperatures, dusty and humid environment. The typical usage is for offices, schools, meeting rooms, retail, hospitals, labs etc.

5" capacitive touch screen for indoor usage with Android OS. It has been designed to be used in a wide range of applications for supervision and technology control.

The panel can be used as a universal user interface for any controller with a webserver.

The panel is supplied together with SAFECONTROL Kiosk application suitable for working with any website in any time. The application allows to set a wide range of parameters according to the needs of a particular project.

KEY FEATURES


Suitable for indoor installation on a wall
Without rotating parts



PoE power supply as an option
Configurable Kiosk SAFECONTROL application

TYPICAL USAGE


Replacement of conventional switches and thermostats
Supervision and control of building technologies
(heating, cooling, air-conditioning, lighting, shading etc.)
Digital signage and information kiosks
Reservation and attendance systems

Interfaces	
Power Supply	12 V DC or PoE according 802.3 af (48 V)*
Power Consumption	20 W
Ethernet	1 x RJ45* PoE 802.3 af (48 V)*
Wireless	Wi-Fi 2,4 GHz, 5 GHz, BT

Housing and Environment	
Dimensions	140 x 87 x 30 mm/200 g
Construction	plast, black
Protection	only for indoor usage
Operating conditons	0°C to 40°C/5% to 95% non-condensating
Certification	CE, FCC, Rohs